

Modular Cooking Range Line 700XP 4-Hot Plates Electric Boiling Top Range on Electric Oven

COOO
U

Modular Cooking Range Line

700XP 4-Hot Plates Electric Boiling Top Range on Electric Oven

371016 (E7ECEH4RE0)

4-hot plate (2,6 kW each) electric range on electric oven (6 kW)

371128 (E7ECEH4REN)

4-hot plate (2,6 kW each) electric range on electric oven (6 kW)

Short Form Specification

Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. Four 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Stainless steel oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

ITEM #

SIS #

AIA #

<u>model #</u> Name #

- The four round 2.6kW cast-iron plates are hermically sealed to the one-piece top.
- Base compartment consists of an electric standard oven with thick oven door for heat insulation, positioned beneath the base plate.
- Electric oven to have separate thermostats for top and bottom heating elements.
- Stainless steel oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans).
- Ribbed enamelled steel oven base plate.
- Oven thermostat adjustable from 140 °C to 300 °C.
- The special design of the control knob system guarantees against water infiltration.
- IPX 4 water protection.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Optional Accessories

GN2/1 chrome grid for static oven	PNC 164250 🗅
• 4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to install with base supports for feet/wheels.	PNC 206135 🗅
 Flanged feet kit 	PNC 206136 🖵
 Frontal kicking strip for concrete installation, 200mm 	PNC 206146 🗅
 Frontal kicking strip for concrete installation, 400mm 	PNC 206147 🗅
 Frontal kicking strip for concrete installation, 800mm 	PNC 206148 🗅
 Frontal kicking strip for concrete installation, 1000mm 	PNC 206150 🗅
 Frontal kicking strip for concrete installation, 1200mm 	PNC 206151 🗅
 Frontal kicking strip for concrete installation, 1600mm 	PNC 206152 🗅
• Frontal kicking strip, 200mm (not for refr- freezer base)	PNC 206174 🗅
• Frontal kicking strip, 400mm (not for refr- freezer base)	PNC 206175 🗅
• Frontal kicking strip, 800mm (not for refr- freezer base)	PNC 206176 🗅
 Frontal kicking strip, 1000mm (not for refr freezer base) 	-PNC 206177 🗅
 Frontal kicking strip, 1200mm (not for refr freezer base) 	-PNC 206178 🗅
 Frontal kicking strip, 1600mm (not for refr freezer base) 	-PNC 206179 🗅
• Kit 4 feet for concrete installation (not for 900 line free standing grill)	PNC 206210 🗅

APPROVAL:

Electrolux Professional professional.electrolux.com professional@electrolux.com

700XP 4-Hot Plates Electric Boiling Top Range on Electric Modular Cooking Range Uven

Electrolux




 Pair of side kicking strips 	PNC 206249 🗅
 Pair of side kicking strips for concrete installation 	PNC 206265 🗅
• Water column with swivel arm (water column extension not included)	PNC 206289 🗅
 Water column extension for 700 line 	PNC 206291 🗅
 Chimney upstand, 800mm 	PNC 206304 🗅
Right and left side handrails	PNC 206307 🗅
 Base support for feet or wheels - 400mm (700/900) 	PNC 206366 🗅
 Base support for feet or wheels - 800mm (700/900) 	PNC 206367 🗅
 Base support for feet or wheels - 1200mm (700/900) 	PNC 206368 🗅
 Base support for feet or wheels - 1600mm (700/900) 	PNC 206369 🗅
 Base support for feet or wheels - 2000mm (700/900) 	PNC 206370 🗅
 Rear paneling - 800mm (700/900) 	PNC 206374 🗅
• Rear paneling - 1000mm (700/900)	PNC 206375 🗅
• Rear paneling - 1200mm (700/900)	PNC 206376 🗅
Chimney grid net, 400mm	PNC 206400 🗅
 2 side covering panels for free standing appliances 	PNC 216000 🗅
 Frontal handrail, 800mm 	PNC 216047 🗅
 Frontal handrail, 1200mm 	PNC 216049 🗅
 Frontal handrail, 1600mm 	PNC 216050 🗅
 Large handrail - portioning shelf, 400mm 	PNC 216185 🗅
• Large handrail - portioning shelf, 800mm	PNC 216186 🗅



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


Electrolux



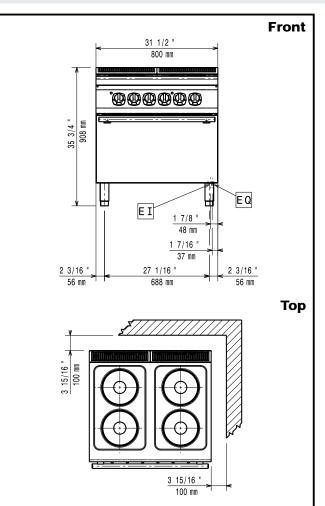

EI = Electrical connection

Side

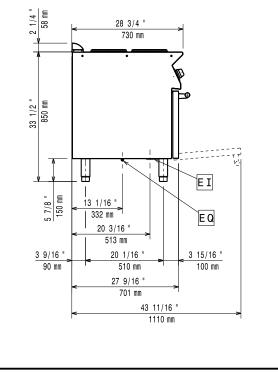

Electric

Supply voltage:	
371016 (E7ECEH4RE0)	400 V/3 ph/50/60 Hz
371128 (E7ECEH4REN)	230 V/3 ph/50/60 Hz
Total Watts:	16.4 kW

Key Information:

-	
Front Plates Power:	2.6 - 2.6 kW
Back Plates Power:	2.6 - 2.6 kW
Front Plates dimensions:	Ø 230 Ø 230
Back Plates dimensions:	Ø 230 Ø 230
Oven working Temperature:	140 °C MIN; 300 °C MAX
Oven Cavity Dimensions (width):	540 mm
Oven Cavity Dimensions (height):	300 mm
Oven Cavity Dimensions (depth):	650 mm
Net weight:	80 kg
Shipping weight:	95 kg
Shipping height:	
371016 (E7ECEH4RE0)	1090 mm
371128 (E7ECEH4REN)	1140 mm
Shipping width:	
371016 (E7ECEH4RE0)	820 mm
371128 (E7ECEH4REN)	900 mm
Shipping depth:	
371016 (E7ECEH4RE0)	900 mm
371128 (E7ECEH4REN)	820 mm
Shipping volume:	
371016 (E7ECEH4RE0)	0.8 m³
371128 (E7ECEH4REN)	0.84 m ³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Modular Cooking Range Line 700XP 4-Hot Plates Electric Boiling Top Range on Electric Oven

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.