

Modular Cooking Range Line 700XP 6-Burner Gas Range on **Electric Oven with Cupboard**

ITEM #
MODEL #
NAME #
SIS#
AIA#



Modular Cooking Range Line

700XP 6-Burner Gas Range on Electric **Oven with Cupboard**

371006 (E7GCGL6C20)

6-burner (5,5 kW each) gas range on electric oven (6 kW) and cupboard

Short Form Specification

Item No.

To be installed on stainless steel feet with height adjustment up to 50 mm. High efficiency flower flame burners with flame regulator and protected pilot light. Flame failure device as standard on burners to protect against accidental extinguishing. Stainless steel oven chamber with 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans). Ribbed oven base plate. Exterior panels of unit in stainless steel with Scotch Brite finish. Pan supports in heavy duty cast iron. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to have stainless steel feet with height adjustment up to 50 mm.
- The six 5.5 kW high efficiency flower flame burners allow the flame to adapt to different size pans.
- Cupboard compartment for storage of pots, pans, sheet pans etc.
- Gas appliance supplied for use with natural or LPG gas, conversion jets supplied as standard.
- Large sized pan support in cast iron (stainless steel as option) with long center fins to allow the use of the largest down to the smallest pans.
- Pan supports in cast iron are washable in a dishwasher.
- Burners to feature flame regulator.
- Flame failure device on each burner protects against gas leakage when accidental extinguishing of the flame occurs.
- Protected pilot light.
- Base compartment consists of an electric standard oven positioned beneath the base plate. Stainless steel oven chamber to have 3 levels of runners to accomodate 2/1 GN shelves (2 steam pans) and ribbed enamelled steel base plate.
- Ribbed oven base plate.
- Oven thermostat adjustable from 140 °C to 300 °C.
- Double skinned door with pressed internal panel for heat insulation.
- IPX 4 water protection.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Included Accessories

- 1 of GN2/1 chrome grid for static oven PNC 164250
- 1 of Door for open base cupboard PNC 206350

Optional Accessories

•	GN2/1 chrome grid for static oven	PNC 164250 □
•	Draught diverter, 150 mm diameter	PNC 206132

• Matching ring for flue condenser, 150 PNC 2061:	133

mm diameter	_
 4 wheels, 2 swivelling with brake 	PNC 206135
(700/900XP). It is mandatory to install	
with base supports for feet/wheels	

APPROVAL:




Modular Cooking Range Line 700XP 6-Burner Gas Range on Electric Oven with Cupboard


			Decree and for factors have a 4/00 and D	NO 20/2/0 🗖
	nged feet kit	PNC 206136 □	 Base support for feet or wheels - 1600mm (700/900) 	PNC 206369 □
	ntal kicking strip for concrete tallation, 200mm	PNC 206146 □	Base support for feet or wheels - 2000mm	PNC 206370 🗖
	ntal kicking strip for concrete tallation, 400mm	PNC 206147 □	(700/900) • Rear paneling - 1200mm (700/900)	PNC 206376 🗖
From inst	ntal kicking strip for concrete tallation, 800mm	PNC 206148 □		PNC 206387 ☐ PNC 216000 ☐
From inst	ntal kicking strip for concrete tallation, 1000mm	PNC 206150 □	appliances	PNC 216049 🗖
	ntal kicking strip for concrete tallation, 1200mm	PNC 206151 🗖	• Frontal handrail, 1600mm	PNC 216050 D
	ntal kicking strip for concrete tallation, 1600mm	PNC 206152 🗖	3 1 3 .	PNC 216186 🗖
	ntal kicking strip, 200mm (not for refrezer base)	PNC 206174 🖵	·	PNC 921685 🗆
	ntal kicking strip, 400mm (not for refrezer base)	PNC 206175 □		
	ntal kicking strip, 800mm (not for refrezer base)	PNC 206176 □		
free	ntal kicking strip, 1000mm (not for refrezer base)			
	ntal kicking strip, 1200mm (not for refr- ezer base)	PNC 206178 □		
free	ntal kicking strip, 1600mm (not for refr- ezer base)			
900	4 feet for concrete installation (not for) line free standing grill)	PNC 206210 □		
con (mı	upports with side runners for 4 GN 1/1 Itainers for open base cupboards Ultifunctional cookers, solid top and gas ges with cupboard)			
• Flue	e condenser for 1 module, 150 mm meter	PNC 206246 □		
Pair	r of side kicking strips	PNC 206249 🖵		
Election	ctric heating kit for cupboards	PNC 206259 🗖		
	gle burner smooth plate for direct oking - fits frontal burners only	PNC 206260 □		
• Sing	gle burner ribbed plate for direct king - fits frontal burners only	PNC 206261 □		
• Sin	gle burner radiant plate for pan support	PNC 206264 □		
	r of side kicking strips for concrete tallation	PNC 206265 □		
 Water column 	ter column with swivel arm (water umn extension not included)	PNC 206289 □		
Wat	ter column extension for 700 line	PNC 206291 □		
Stall	inless steel double grid for 2 burners	PNC 206297 🗖		
• Chi	mney upstand, 1200mm	PNC 206306 🖵		
	ht and left side handrails	PNC 206307 🗖		
•	or for open base cupboard	PNC 206350 🗆		
• Wo	k pan support for open burners 0/900)	PNC 206363 □		
• Bas (70	se support for feet or wheels - 400mm 0/900XP)	PNC 206366 □		
(70	se support for feet or wheels - 800mm 0/900)	PNC 206367 □		
	se support for feet or wheels - 1200mm 0/900)	PNC 206368 □		






Modular Cooking Range Line 700XP 6-Burner Gas Range on Electric Oven with Cupboard





EI = Electrical connection G = Gas connection

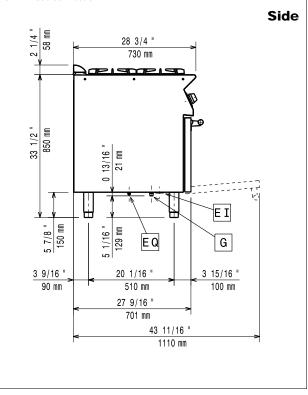

Electric

Supply voltage:

371006 (E7GCGL6C20) 400 V/3N ph/50/60 Hz

Connected load:6 kWTotal Watts:6 kWOven Heat Input:6 kW

Gas

Gas Power: 112497 Btu/hr (33 kW)

Gas Type Option: LPG;Town Gas Inlet: 1/2"

Natural gas - Pressure: 7" w.c. (17.4 mbar) LPG Gas Pressure: 11" w.c. (27.7 mbar)

Key Information:

Front Burners Power: 5.5 - 5.5 kW

Back Burners Power: 5.5 - 5.5 kW

Middle Burners Power: 5.5 - 0/5.5 - 0 kW

Back Burners Dimension - mm Ø 60 Ø 60

Front Burners Dimension - mm Ø 60 Ø 60

Middle Burners Dimension - mm Ø 60 Ø 60

Oven working Temperature: 140 °C MIN; 300 °C MAX

Oven Cavity Dimensions (width): 540 mm
Oven Cavity Dimensions (height): 300 mm
Oven Cavity Dimensions (depth): 650 mm

Storage Cavity Dimensions

(width): 330 mm

Storage Cavity Dimensions

(height): 380 mm

Storage Cavity Dimensions

(depth): 640 mm

Net weight: 120 kg

Shipping weight: 135 kg

Shipping height: 1140 mm

Shipping width: 820 mm

Shipping depth: 1300 mm

Shipping volume: 1.22 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.



Modular Cooking Range Line 700XP 6-Burner Gas Range on Electric Oven with Cupboard