

Modular Cooking Range Line **700XP Freestanding Electric** Pasta Cooker, 2 Wells 24.5 litres



Modular Cooking Range Line

700XP Freestanding Electric Pasta Cooker, 2 Wells 24.5 litres

371099 (E7PCEH2KF0)

Freestanding electric pasta cooker, 24.5lt well, 2 wells -400V

Short Form Specification

Item No.

Unit to be Electrolux 700XP Freestanding Electric Pasta Cooker, 24.5 liters, two wells. Electric characteristics to be _____ 400 V three phase. Unit to feature infrared heating system. The unit shall feature constant starch removal during the cooking process. The tanks are pressed in 316 type Stainless steel to protect against corrosion. Manual water tap. Height adjustable feet in stainless steel. Exterior panels of unit in Stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick Stainless steel. Unit has right-angled side edges to allow flush-fitting junction between units.

ITEM #		
MODEL #		
NAME #		
SIS #		
<u>AIA #</u>		

Main Features

- In addition to cooking pasta, the appliance can be used for noodles of every kind, rice, dumplings and vegetables.
- Unit to have infrared heating system positioned beneath the base of the wells.
- Water basins in 316 type Stainless steel.
- Water basins are seamlessly welded into the top of the appliance.
- Provided with integrated drip tray on which baskets can be placed for draining purposes.
- 24.5 liters water basins.
- Unit to feature skimming zone for starch removal: improved water quality over time.
- Easy-to-use control panel.
- Safety thermostat to avoid operation without water.
- Continuous water filling regulated through a manual water tap.
- Large drain with manual ball-valve for fast emptying of well.
- ESD available as accessory (installed separately): energy • saving device uses heat produced by water drained through the overflow to pre-heat tap-in water up to 60°C, for constant water boiling.
- EnergyControl: unique feature for fine power adjustment to control boiling level and optimize energy consumption.
- Automatic lifting system (optional accessory): 200mm wide unit with two stainless steel basket supports, holding one GN 1/2 basket each, to be placed on either or both sides of machine to provide automatic lifting for four small portion baskets (to be ordered separately). Possibility to memorize nine cooking times through digital control.
- All major compartments located in front of unit for ease of mainténance.
- IPX4 water resistance certification.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Electrolux

APPROVAL:



Included Accessories 2 of Door for open base cupboard PNC 206350 **Optional Accessories** • 4 wheels, 2 swivelling with brake (700/900XP). PNC 206135 It is mandatory to install with base supports for feet/wheels. · Flanged feet kit PNC 206136 🗅 Frontal kicking strip for concrete installation, PNC 206146 🗅 ٠ 200mm Frontal kicking strip for concrete installation, PNC 206147 🗅 400mm Frontal kicking strip for concrete installation, PNC 206148 🗅 800mm Frontal kicking strip for concrete installation, PNC 206150 🗅 1000mm Frontal kicking strip for concrete installation, PNC 206151 🗅 1200mm PNC 206152 🗅 Frontal kicking strip for concrete installation, 1600mm • Frontal kicking strip, 200mm (not for refr-PNC 206174 🗅 freezer base) · Frontal kicking strip, 400mm (not for refr-PNC 206175 🗅 freezer base) · Frontal kicking strip, 800mm (not for refr-PNC 206176 🗅 freezer base) Frontal kicking strip, 1000mm (not for refr-PNC 206177 🗅 freezer base) Frontal kicking strip, 1200mm (not for refr-PNC 206178 🗅 freezer base) • Frontal kicking strip, 1600mm (not for refr-PNC 206179 freezer base) Kit 4 feet for concrete installation (not for 900 PNC 206210 🗅 line free standing grill) · Pair of side kicking strips PNC 206249 · Pair of side kicking strips for concrete PNC 206265 installation • Water column with swivel arm (water column PNC 206289 🗅 extension not included) • Water column extension for 700 line PNC 206291 Chimney upstand, 800mm PNC 206304 · Right and left side handrails PNC 206307 🗅 Energy saving device for pasta cookers PNC 206344

• Door for open base cupboard

(700/900)

(700/900)

(700/900)

(700/900)

(700/900)

for 24,5lt pasta cookers, 2 liftersBase support for feet or wheels - 400mm

Base support for feet or wheels - 800mm

· Base support for feet or wheels - 1200mm

· Base support for feet or wheels - 1600mm

Base support for feet or wheels - 2000mm

• Rear paneling - 800mm (700/900)

Rear paneling - 1000mm (700/900)
Rear paneling - 1200mm (700/900)

Chimney grid net, 400mm

Modular Cooking Range Line 700XP Freestanding Electric Pasta Cooker, 2 Wells 24.5 litres

- 2 side covering panels for free standing appliances PNC 216000 • Frontal handrail, 800mm PNC 216047 🗅 Frontal handrail, 1200mm PNC 216049 🗅 Frontal handrail, 1600mm PNC 216050 🗅 Large handrail - portioning shelf, 400mm PNC 216185 🗅 Large handrail - portioning shelf, 800mm PNC 216186 🗅 Support frame for 4 baskets for 24,5lt pasta PNC 921606 🗅 cookers • Lid for 24,5lt pasta cookers PNC 921607 🗅 • 2 half size baskets 170x220 for 24,5lt pasta cookers PNC 921610 🗅
- Full size basket for 24,5lt pasta cookers PNC 921611
- 4 baskets 105x160 for 24,5lt pasta cookers (921606 must be ordered together)
 PNC 921618 □
- 2 half size baskets 105x350 for pasta cookers for 24,5lt pasta cookers

	Modular Cooking Range Line
700XP Freestanding Electric	Modular Cooking Range Line Pasta Cooker, 2 Wells 24.5 litres



6 baskets (105x105) for pasta cookers - 700XP PNC 206397

• Automatic programmable basket lifting system PNC 206352

PNC 206350 D

PNC 206366 🗅

PNC 206367 🗅

PNC 206368 🗅

PNC 206369


PNC 206370 🗆

PNC 206374
PNC 206375
PNC 206375

PNC 206376 🗅

PNC 206400 🗅

Electrolux

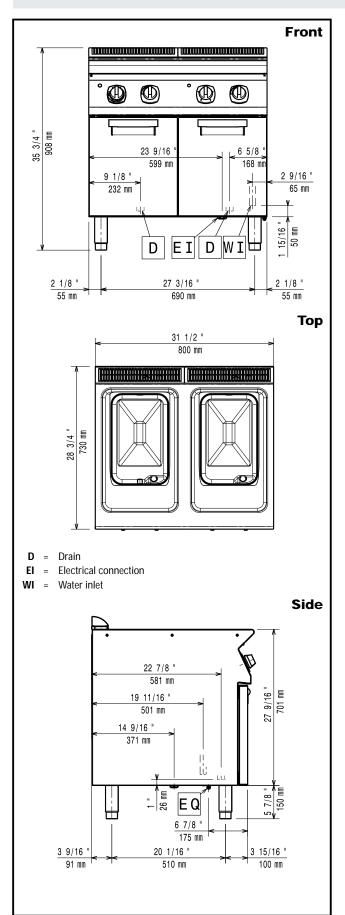

(F

<u>11</u>)

Modular Cooking Range Line 700XP Freestanding Electric Pasta Cooker, 2 Wells 24.5 litres

Electric

Supply voltage: 371099 (E7PCEH2KF0)	400 V/3N ph/50/60 Hz
Electrical power:	12 kW
Total Watts:	12 kW
Water:	
Drain "D":	1"
Incoming Cold Water line size:	1/2"
Total hardness:	5-50 ppm

Electrolux recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Key Information:

Usable well dimensions (width):	250 mm
Usable well dimensions (height):	300 mm
Usable well dimensions (depth):	400 mm
Well Capacity (MAX):	24.5 It MAX
Net weight:	50 kg
Shipping weight:	105 kg
Shipping height:	1140 mm
Shipping width:	880 mm
Shipping depth:	830 mm
Shipping volume:	0.83 m ³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Modular Cooking Range Line 700XP Freestanding Electric Pasta Cooker, 2 Wells 24.5 litres

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.